


INDEURO
CERAMIC

SOLUBLE SALT
PORCELAIN TILES
(**POLISHED**)

POLISHED PORCEALIN TILES - SOLUBLE SALT

INDEURG
CERAMIC

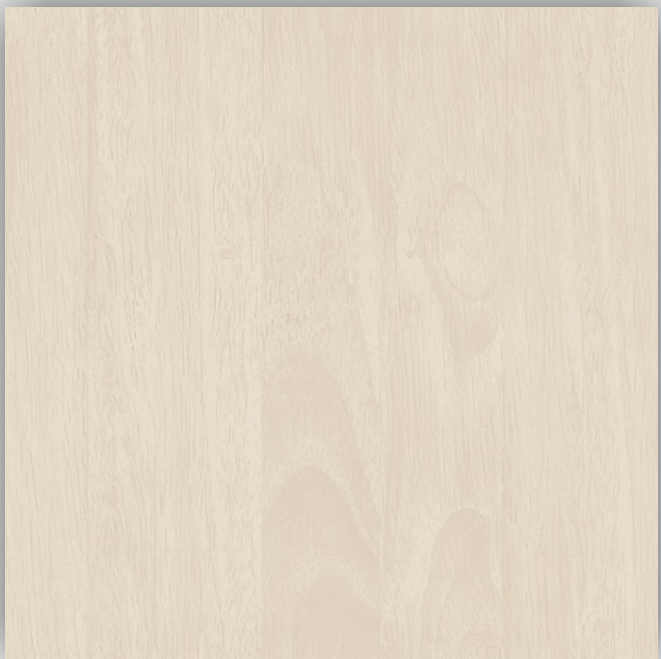

INDEURG
CERAMIC

**PINE WOOD
60X60CM
SOLUBLE
PORCEALIN TILES**

Email.: rk@indeuro.in | Web: www.indeuro.in | +91- 9825913400

TECHNICAL SPECIFICATION

SR	Property	ISO 13006/EN 176 Group Bia	VALUE	Method of testing
1.	Oevlationin Length	± 0.6%	±0.1 %	EN 93
2.	Oeviationin Thickness	± 0.5%	± 0.1 %	EN 93
3.	Straightness of Sides	± 0.5%	± 0.1 %	EN 93
4.	Rcctangularity	± 0.6%	± 0.2%	EN 93
5.	Surface flatness	± 0.5%	± 0.2%	EN 93
6.	Water Absorption*	<0,5%	<0.03%	EN 99
7.	Mohs Hardness*	>6	>8	EN 101
8.	Flexural Straightness*	> 27 N/mm ²	>47 N/mm ²	EN 100
9.	Abrasion Resistance	> 204mm ²	> 144 mm ²	EN 102
10.	Skid Resistance	>0.4	>0.6	ASTM C-1028
11.	Breaking Strength*	1113 N	2830 N	ASTMC-648
12.	Density (g/cc)	> 2	2.4	DIN 51082
13.	Frost Resistance	F1ost proof	Frost proof	EN 202
14.	Chemical Resistance	No Damage	No Damage	EN 106
15.	Thermal Shock Resistance	No Damage	No Damage	EN 104
16.	Colour Resistance	No Damage	No Damage	OIN 51094
17.	Thermal Expansion	<9x10 ⁻⁶	< 6:x10 ⁻⁶	EN 103
18.	Stain Resistance	Resistance	Resistance	ISO 10545-14
19.	MOisturo Expansion	Nil	NII	ISO 10545-10
20.	Glossiness		Min 65 -70% Reflection	Glossmeter
19.	Nano Glossoess		Min 65-70% Reflection	G1ossmeter

BOX Packing

PCS Per BOX	Square MTR P/Box	BOX Weight	Tiles Thickness
4	1.44M ²	24.5KG	8mm

Contaiern Loadability

Boxes P/Pallet	P/Pallet m ²	Pallet P/Cont	Square MTR P/Cont
40	63.36	27	1555.20

Total 1080 Boxes in each Cont