

# INDEURO

CERAMIC



**GLAZED POLISHED  
PORCELAIN  
TILES  
60X60CM**



Surface: Glossy



INDEURG  
CERAMIC

CRYSTAL GRIS




GLAZED  
POLISHED  
PORCELAIN TILES  
| 60X60CM



WALL GLOSSY FLOOR

Random Face

Surface: Glossy

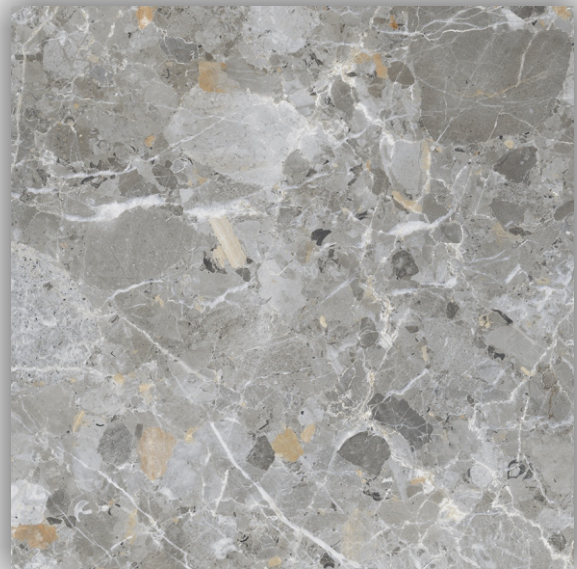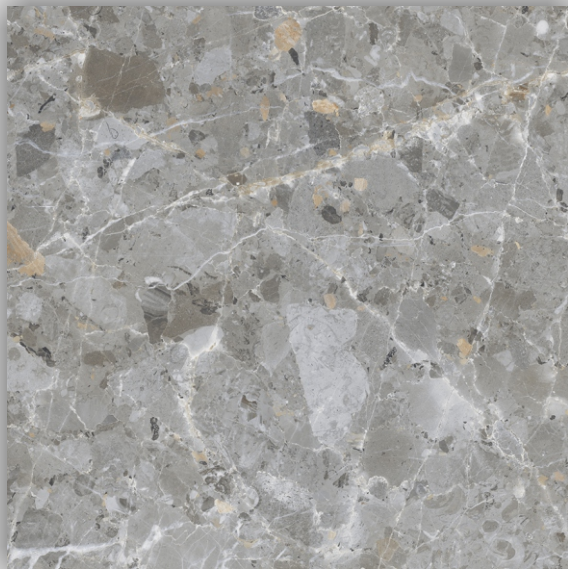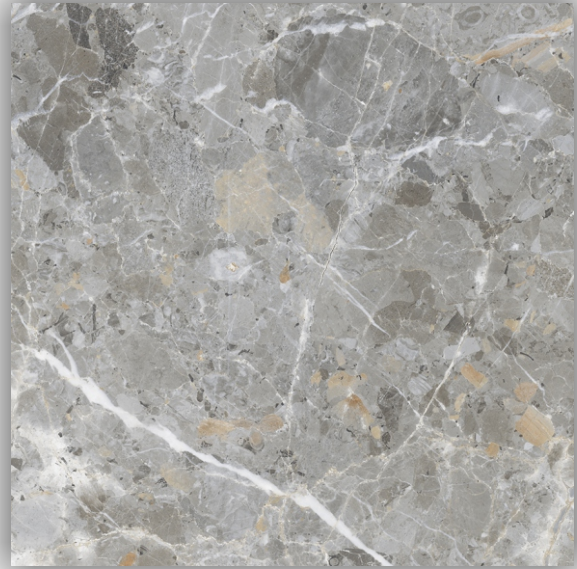

CEMENTO SILVER

GLAZED  
POLISHED  
PORCELAIN TILES  
| **60X60CM**

Random Face

Surface: Glossy



CEMENTO SILVER

GLAZED  
POLISHED  
PORCELAIN TILES  
**60X60CM**

r. No.	Property	STANDARD AS PER ISO-13006/EN14411 GROUP BIa	INDEURO Value	Test Method
1	Deviation in Length	± 0.6%	± 0.3%	ISO 10545-2
2	Deviation in Thickness	± 5%	± 4%	ISO 10545-2
3	Straightness of Sides	± 0.5%	± 0.1%	ISO 10545-2
4	Rectangularity	± 0.6%	± 0.1%	ISO 10545-2
5	Surface Flatness	± 0.5%	± 0.2%	ISO 10545-2
6	Surface Quality (%)	A minimum of 95% of the tiles shall be free from visible defects that would impair the appearance of a major area of tile	98% free from visible defects	ISO 10545-2
7	Glossiness	As per Mfrg	Min 90%	Glossmeter
8	Modulus of Rupture	> 35 N/mm <sup>3</sup>	40 N/mm <sup>2</sup>	ISO 10545-4
9	Breaking Strength	> 1300 N	> 2000 N	ISO 10545-4
10	Water absorption	< 0.5%	< 0.08%	ISO 10545-3
11	Stain Resistance	Stain Proof	Stain Proof	ISO 10545-14
12	Chemical Resistance	No Damage	No Damage	ISO 10545-13
13	Thermal Expansion	< 9*10 <sup>-6</sup>	< 6*10 <sup>-6</sup>	ISO 10545-8
14	Moisture Expansion	Nil	Nil	ISO 10545-10
15	Thermal Shock Resistance	No Damage	No Damage	ISO 10545-9
16	Resistance Of Surface Abrasion	Manufacturer to state abrasion class	PEI class 3	ISO 10545-7

# GLAZED POLISHED PORCELAIN TILES

## 60X60CM

