

INDEURO

CERAMIC



Random Faces



POLISHED FLOOR


IDEALLY SUITABLE FOR
FLOOR APPLICATION

TRAVERTYNA BEIGE

GLAZED POLISHED PORCELAIN TILES

60X60CM

Random Faces _____

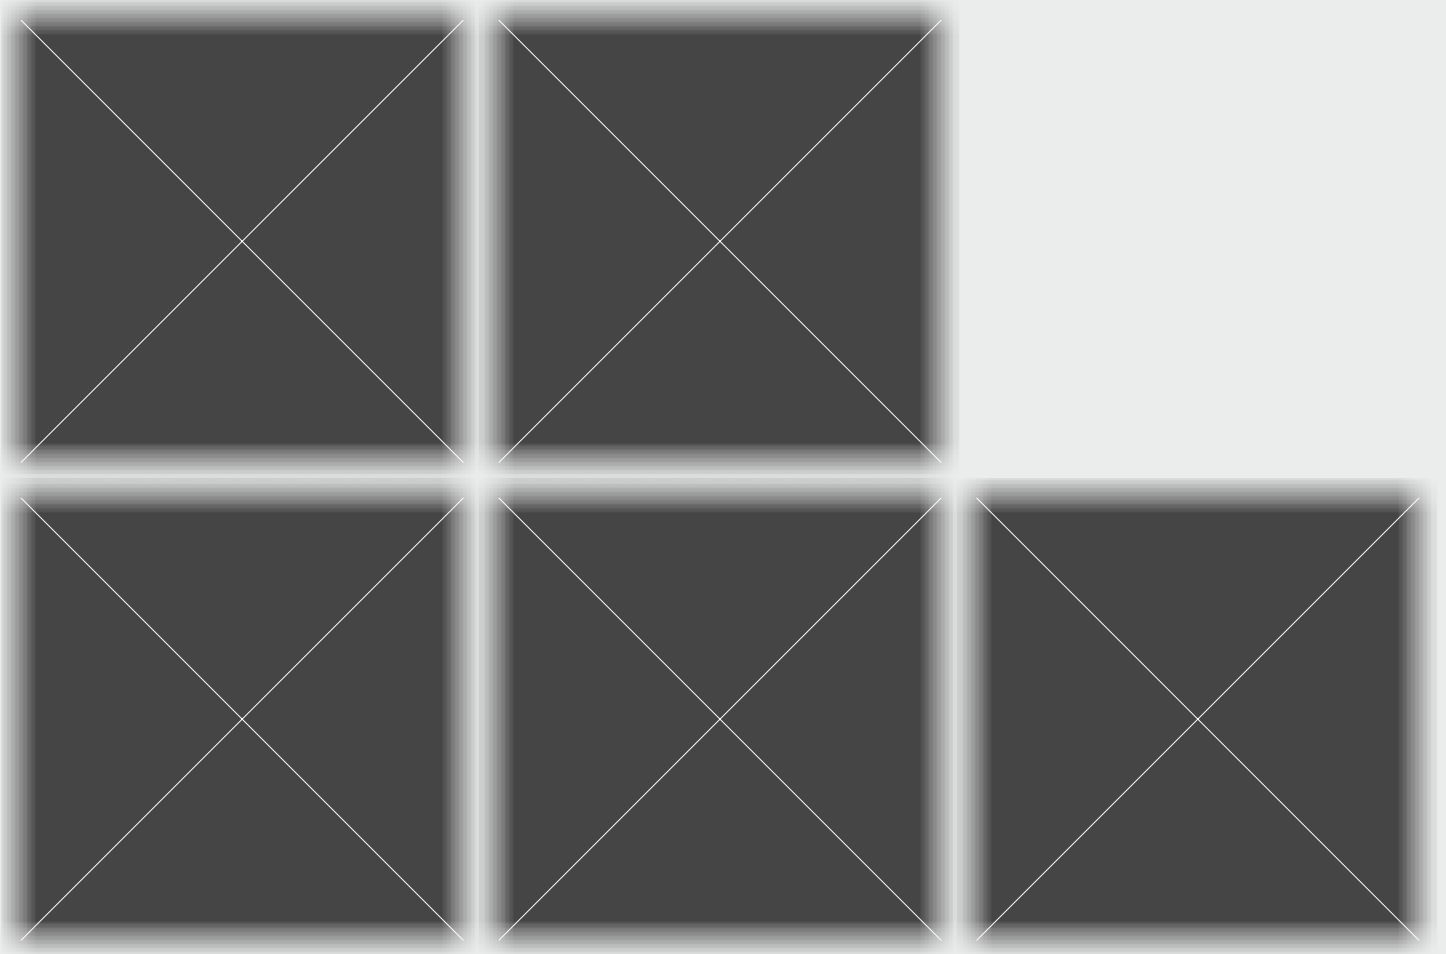

TRAVERTYNA BEIGE

**GLAZED POLISHED
PORCELAIN TILES**

60X60CM

  IDEALLY SUITABLE FOR
POLISHED FLOOR FLOOR APPLICATION

r. No.	CHARACTERISTIC	STANDARD AS PER ISO -13006/EN14411 GROUP BILL	INDEURO Value	Test Method
REGULATORY PROPERTIES				
1	Deviation in length & width	± 0.5%	±0.3%	ISO-10545-2
2	Deviation in thickness	± 5.0%	± 4.0%	ISO-10545-2
3	Straightness in sides	± 0.5%	± 0.1%	ISO-10545-2
4	Rectangularity	± 0.5%	± 0.1%	ISO-10545-2
5	Surface flatness	± 0.5%	± 0.2%	ISO-10545-2
6	Color Difference	Unlterned	No change	ISO-10545-16
7	Glossiness	As per mfg.	Min 90%	GLOSSOMETER
STRUCTURAL PROPERTIES				
8	Water absorption	< 0.50%	< 0.05%	ISO-10545-3
9	Apparent density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES				
10	Modulus of repture	Min. 35 N/mm2	Min. 40 N/mm2	ISO-10545-4
11	Breaking strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
12	Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES				
13	Surface abrasion resistance	As per mfg.	Min. Class-3	ISO-10545-7
14	MOH's hardness	As per mfg.	Min. 6	EN 101
THERMO HYGROMRTRIC PROPERTIES				
15	Frost Resistance	No damage	No damage	ISO-10545-12
16	Thermal Shock Resistance	No damage	No damage	ISO-10545-9
17	Moisture Expansion	Nil	Nil	ISO-10545-10
18	Thermal Expansion(COE)	Max. 9.0 x 10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	ISO-10545-8
18	Crazing Resistance	As per mfg.	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES				
19	Chemical Resistance	No damage	No damage	ISO-10545-13
20	Stain Resistance	Resistant	Resistant	ISO-10545-14
SAFETY PROPERTIES				
21	Slip Resistance	As per mfg.	> 0.40	ISO-10545-17
22	Fire Resistance	As per mfg.	Fireproof	N.A.

TRAVERTYNA BEIGE

**GLAZED POLISHED
PORCELAIN TILES**

60X60CM

